

# Data Sheet



## Passive telecoil T 10 AA 01


9012 - 1048140  
Version:4 12-JAN-2007

### Description


Inductive pick-up coil for use in hearing instruments.

### Features

- Highly durable coating
- Small size
- High sensitivity



### Dimensions

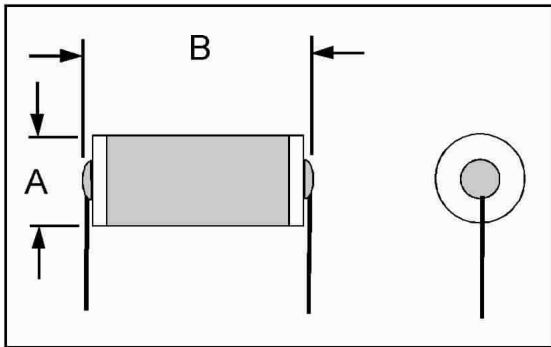

### Mechanical data

Dimensions	in mm	in inch
Dimension A max.	1.78	0.0701
Dimension B max.	7.61	0.2996

### Electrical data

Measuring conditions: Temperature = 23°C (73.4F)

Parameters	Min	Typ	Max	Unit	Comments
DC resistance	1980	2200	2420	Ohm	
Inductance @ 1 kHz	234	275	316	mH	
O. C. 1 kHz Sensitivity	-57.2	-55.7	-54.2	dBV/A/m	
10 kOhm load 1 kHz Sensitivity	-59	-57.5	-56	dBV/A/m	
Resonance frequency	85			kHz	
Winding sense	North positive				

### Lead wires

Start lead description: Green, 51 mm, #34 AWG (Ø 0.160 mm), solid Cu with PU coating, 0.7 mm silverplated

Finish lead description: Red, 51 mm, #34 AWG (Ø 0.160 mm), solid Cu with PU coating, 0.7 mm silverplated

Lead wire length measured from edge flange.

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.